




# SIL-3 Fault Detecting Digital Output Card

3138/ 3139/ 3140

## PRODUCT HIGHLIGHTS

- Safety/ Critical Control Applications
- 32, 24, 18 Digital Output Channels
- Line and Load checking
- Supports Source Voltages of 19 VDC  
30 VDC
- Source up to 0.5 A per Channel
- Optically Isolated, Fuse Protected Outputs

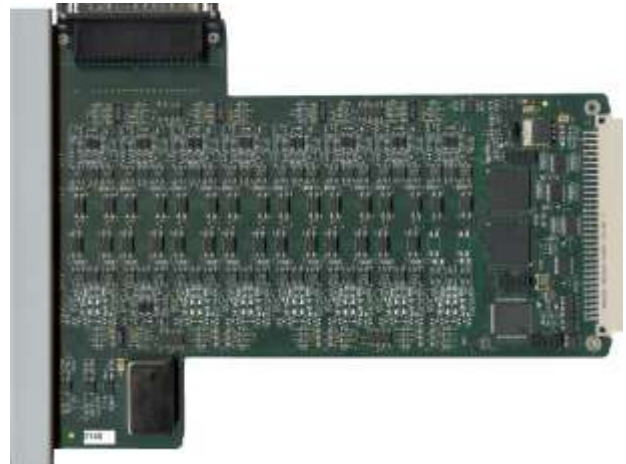

3140 -18 Ch Fault Detecting Digital Output Card

## PRODUCT OVERVIEW

The Fault Detecting Digital Output Card set is designed for use in safety and critical control applications. Depending upon your application's requirements, you can choose the 18, 24, or 32 channel option. The 3138, 3139, or 3140 Fault Detecting Digital Output Card can be used in any RTP3000 TAS family chassis to provide source voltages to an indicator lamp, solenoid valve, interposing relay, or any other discrete control device.

Active circuit testing provides line open and line short checking, on and off testing of FETs for stuck conditions and channel readback values. Any fault detected is reported in the integer status word for the card.

All channels are isolated from the RTP chassis ground. Voltages of 19V to 30V DC may be controlled by the output channels. Each channel can source up to 0.5 amp per channel.

When the channel is active, a positive voltage will be applied to the control device. Each channel is fuse protected by a 1.0 Amp slow active fuse located on the termination module. The MOSFET driver circuit also includes an over current detection circuit that will shut off the FET switch and report a fault if a current above 1.6 amps is detected.

The 3138 32-Channel card is rated for SIL-2 applications. The 3139 24-Channel and 3140 18-Channel cards are rated for SIL-3 applications.

The 3138 card is SIL-2 with high integrity of 32 output channels. Increased safety integrity to SIL-3 is achieved on the 3139 and 3140 cards. The 3139 cards have one safety switch per three output channels; the 3140 have two safety switches. The safety switch provides the diagnostics additional capability to de-energize the output channels in response to a fault condition or watchdog timer timeout. Diagnostics test each output channel's switch to verify operation and reports any faults detected.

### RTP is the Best Technology for Your Investment,

Here's why:

The 3000 TAS is a multi-processor architecture that delivers exceptional Performance and Comprehensive Diagnostics. The results speak for themselves: A reaction time of 12 msec, true 1 msec SOE (Analog and Digital), an MBTF of greater than 50000 years an MTTFS of greater than 60000 years, and a PFDavg of  $5 \times 10^{-5}$ . **Compare these numbers to any other system.**

Built-in proof test diagnostics means it will never be necessary to shut down at the proof test interval. Unlimited online downloads of logic and configuration changes do not require a periodic shut down like other systems. **Compare this functionality to any other system.**

NetSuite Software: One-time price includes unlimited use of Logic Development, Alarm Manager, Data Archive and Historian and HMI without hardware or software keys. **Compare this functionality and price to all other systems.**

Finally, a Safety Instrumented System (SIS) should always take the process it protects to a safe state when it is required to do so, and it should never interfere with the operation of the process at the time. **The 3000 TAS does this better than any other system.**

## SPECIFICATIONS

### 3138 18-Channel Fault Detecting Digital Output Card

|  |  |
|--|--|
| Safety Integrity Level                     | SIL 2  |
| Number of Channels                         | 32   |
| Maximum open circuit voltage               | 30VDC  |
| Maximum closed circuit current per channel | 0.5 Amp, Fuse protected to 1.0 Amps Slow Acting<br>Total Current for all channels not to exceed 8 Amps |
| Maximum power dissipation per channel      | 0.63 Watts   |
| Maximum voltage drop @ 0.5 Amps            | 1.25 Volts   |
| Minimum Load                               | 6 mA (Single card), 12 mA (Dual Redundant)   |
| Maximum Leakage Current with Outputs off   | 250 $\mu$ A  |
| Maximum Output Test Pulse Width            | 200 $\mu$ s  |
| Output Configuration                       | 32 Outputs   |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (ON to OFF)   |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (OFF to ON)   |
| Isolation from RTP system                  | 500V AC/DC   |
| Backplane Power                            | 5 VDC @ 200 mA<br>24 VDC @ 55 mA   |
| Field Power                                | 19 VDC to 30 VDC, 8.2 Amps maximum   |
| Power Dissipation                          | 14 Watts – 48 BTU/hr   |
| Programmable Watchdog Timer                | 150 msec   |
| Hardware Watchdog Timer                    | 0.68 to 1.4 seconds  |

## ENVIRONMENTAL SPECIFICATIONS

|                    |  |
|--------------------|--|
| Temperature range: | -20°C to +60°C, operating, -20°C to +85°C, storage |
| Altitude:          | Operation to 10,000 feet                           |
| Humidity range:    | 10 to 95 % relative humidity, non-condensing       |

## TERMINATION MODULES

|             |   |
|-------------|---|
| 3099/48-001 | Single Termination Module – 32 channel, 24 VDC sourcing (breaks the positive)         |
| 3099/48-000 | Dual Redundant Termination Module – 32 Channel, 24 VDC sourcing (breaks the positive) |

## SPECIFICATIONS

### 3139 24-Channel Fault Detecting Digital Output Card

|  |  |
|--|--|
| Safety Integrity Level                     | SIL 3  |
| Number of Channels                         | 24   |
| Maximum open circuit voltage               | 30VDC  |
| Maximum closed circuit current per channel | 0.5 Amp, Fuse protected to 1.0 Amps Slow Acting<br>Total Current for all channels not to exceed 8 Amps |
| Maximum power dissipation per channel      | 0.63 Watts   |
| Maximum voltage drop @ 0.5 Amps            | 1.25 Volts   |
| Minimum Load                               | 6 mA (Single card), 12 mA (Dual Redundant), 18 mA (Triple Redundant)                                   |
| Maximum Leakage Current with Outputs off   | 250 $\mu$ A  |
| Maximum Output Test Pulse Width            | 300 $\mu$ s  |
| Output Configuration                       | 24 Output Channels with 8 safety switches, one for every 3 channels                                    |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (ON to OFF)   |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (OFF to ON)   |
| Isolation from RTP system                  | 500V AC/DC   |
| Backplane Power                            | 5 VDC @ 200 mA<br>24 VDC @ 55 mA   |
| Field Power                                | 19 VDC to 30 VDC, 8.2 Amps maximum   |
| Power Dissipation                          | 14 Watts – 48 BTU/hr   |
| Programmable Watchdog Timer                | 150 msec   |
| Hardware Watchdog Timer                    | 0.68 to 1.4 seconds  |

## ENVIRONMENTAL SPECIFICATIONS

|                    |  |
|--------------------|--|
| Temperature range: | -20°C to +60°C, operating, -20°C to +85°C, storage |
| Altitude:          | Operation to 10,000 feet                           |
| Humidity range:    | 10 to 95 % relative humidity, non-condensing       |

## TERMINATION MODULES

|             |   |
|-------------|---|
| 3099/52-001 | Single Termination Module – 24 channel, 24 VDC sourcing (breaks the positive)           |
| 3099/52-000 | Triple Redundant Termination Module – 24 Channel, 24 VDC sourcing (breaks the positive) |

## SPECIFICATIONS

### 3140 18-Channel Fault Detecting Digital Output Card


|  |  |
|--|--|
| Safety Integrity Level                     | SIL 3  |
| Number of Channels                         | 18   |
| Maximum open circuit voltage               | 30VDC  |
| Maximum closed circuit current per channel | 0.5 Amp, Fuse protected to 1.0 Amps Slow Acting<br>Total Current for all channels not to exceed 8 Amps |
| Maximum power dissipation per channel      | 0.63 Watts   |
| Maximum voltage drop @ 0.5 Amps            | 1.25 Volts   |
| Minimum Load                               | 6 mA (Single card), 12 mA (Dual Redundant), 18 mA (Triple Redundant)                                   |
| Maximum Leakage Current with Outputs off   | 250 $\mu$ A  |
| Maximum Output Test Pulse Width            | 300 $\mu$ s  |
| Output Configuration                       | 18 Output Channels with 12 safety switches, two for every 3 channels                                   |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (ON to OFF)   |
| Backplane to Card Output Delay Time        | <175 $\mu$ s (OFF to ON)   |
| Isolation from RTP system                  | 500V AC/DC   |
| Backplane Power                            | 5 VDC @ 200 mA<br>24 VDC @ 55 mA   |
| Field Power                                | 19 VDC to 30 VDC, 8.2 Amps maximum   |
| Power Dissipation                          | 14 Watts – 48 BTU/hr   |
| Programmable Watchdog Timer                | 150 msec   |
| Hardware Watchdog Timer                    | 0.68 to 1.4 seconds  |

## ENVIRONMENTAL SPECIFICATIONS

|                    |  |
|--------------------|--|
| Temperature range: | -20°C to +60°C, operating, -20°C to +85°C, storage |
| Altitude:          | Operation to 10,000 feet                           |
| Humidity range:    | 10 to 95 % relative humidity, non-condensing       |

## TERMINATION MODULES

|             |   |
|-------------|---|
| 3099/53-001 | Single Termination Module – 18 channel, 24 VDC sourcing (breaks the positive)           |
| 3099/53-000 | Triple Redundant Termination Module – 18 Channel, 24 VDC sourcing (breaks the positive) |

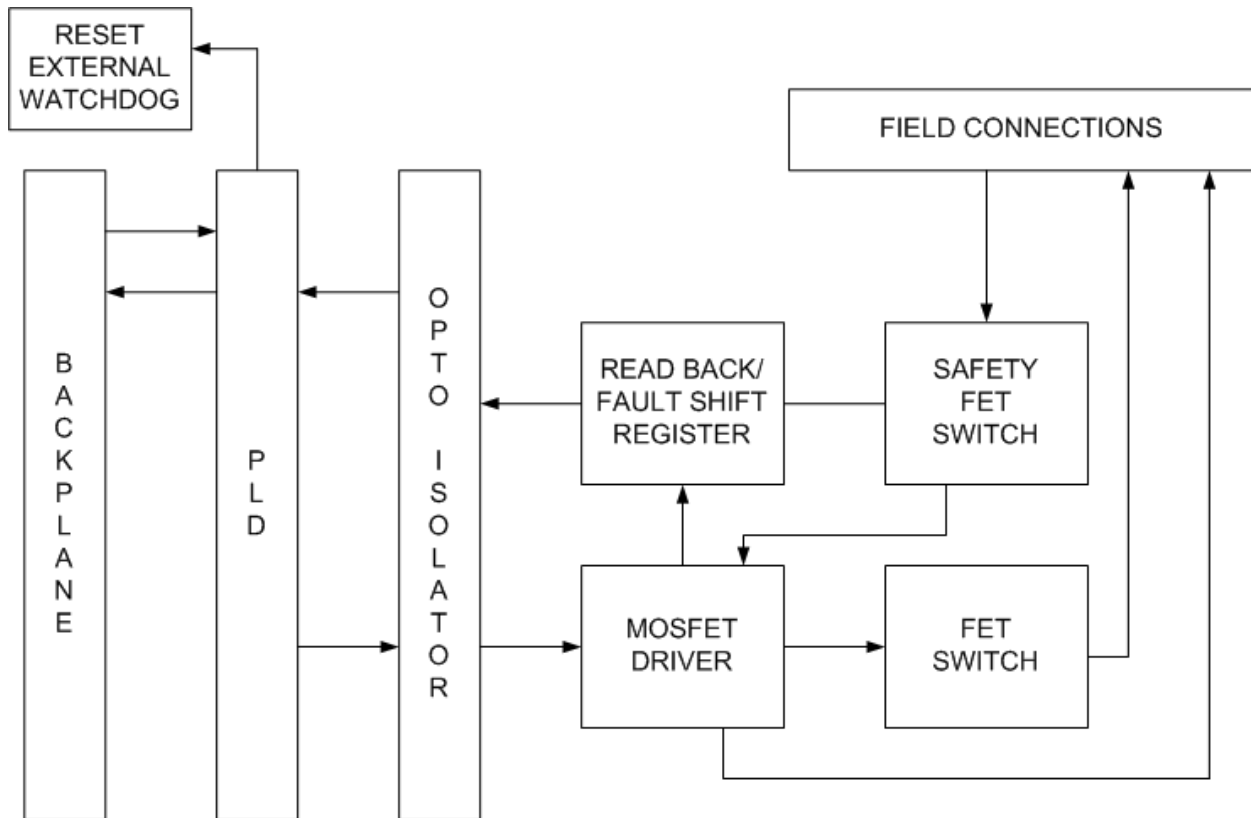

Trademark acknowledgments: RTP is a registered trademark of RTP Corp. All other product or service names mentioned herein are trademarks of their respective owners. Specifications and information are subject to change without notice. Contact RTP Corp office for the latest specifications.

All information, data graphics and statements in this document are proprietary intellectual property of RTP Corp. unless otherwise indicated and are to be considered RTP Corp. confidential. This intellectual property is made available solely for the direct use of the potential or licensed RTP corp. customers in their application of RTP Corp. produces, and any other use or distribution is expressly prohibited. If you have received this publication in error, immediately delete, discard or return to RTP Corp.